

advantage range CRR280

2-piston radial mount R-type caliper

Part numbers and handing

Disc Thickness	Position	Ø44.45 pistons
22.9-25.4 mm	LH trailing	CRR280/25-44LT
	RH trailing	CRR280/25-44RT
	LH leading	CRR280/25-44LL
	RH leading	CRR280/25-44RL



Replacement parts

Item	Ø44.45 pistons
Seal Kit, axle set	CSK45E900
Pistons, ALUMINIUM (each)	PAS4448X553
Pistons, STAINLESS STEEL (each)	PSS4426X600
AKB Springs (each)	SSC3435X609
Bridge Pipe (each)	PSC3451X652
Bleed Screw (each)	FSB0080X008
Inlet Adapter, 3/8 UNF male to male	FSA3435X630
Copper gasket	FCG0080X015

Applications

Rally Rear, Single Seater, Saloon Car Rear, Hill Climb.



Key features and benefits

- Radial mounting for maximum rigidity and firm, consistent pedal.
- Aluminium pistons as standard, stainless steel pistons available as an option to reduce heat transfer to brake fluid.
- 2Kg Anti-knock back springs.
- Pad retaining wire for fast pad change.
- Stainless steel fluid transfer pipe.

Specifications

- Disc diameter range: ø250 - 280mm.
- Disc thickness range: 22.9 - 25.4mm.
- Fluid inlet 3/8-24 UNF (-3) female.
- Dry weight 1.35kg excluding pads.
- Alcon pad reference: 3451/42 area 49.2cm² per caliper, 3451/47 area 56.0cm² per caliper, 14mm thick, 63.4mm long.

Installation dimensions

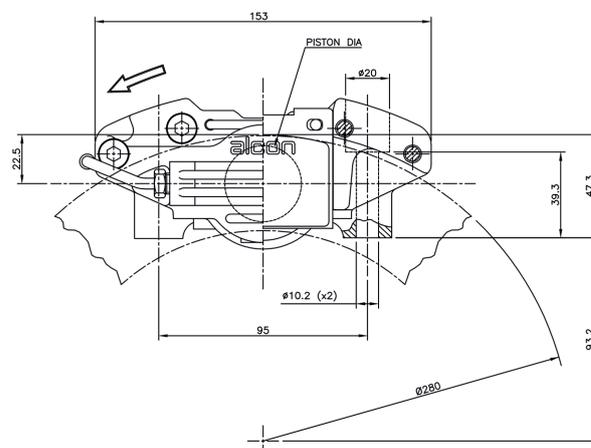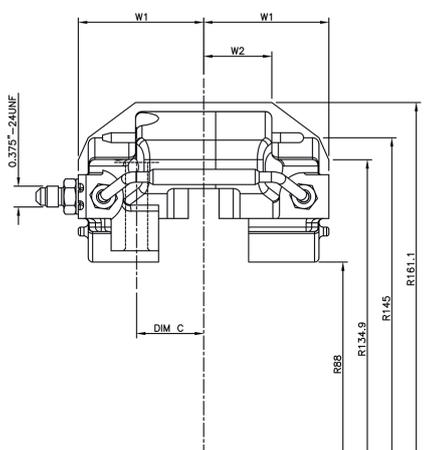

CALIPER PART No.	PISTON DIA	DISC THICK	DIM C	DIM W1	DIM W2
CRR280/11-35LL&RL CRR280/11-35LT&RT	Ø34.9	11.1	30.5	57	31
CRR280/25-44LL&RL CRR280/25-44LT&RT	Ø44.5	25.4	36.5	65	39