


motorsport rally range **KDC550**

ø140 (5.5") Rally driven plates

Specifications

Spline Size	Ø	No. of Teeth	A Type 11.7mm long hub	B Type 9.6mm long hub	New Thickness
21 × 18T	21	18	KDC550FA17X001	KDC550FB17X001	6.0
7/8" × 20T	22.2	11.5	KDC550FA25X001	KDC550FB25X001	6.0
24.25 × 21T	24.25	21	KDC550FA27X001	KDC550FB27X001	6.0
1" × 23T	25.4	23	KDC550FA30X001	KDC550FB30X001	6.0
22 × 28T	22	28	KDC550FA95X001	KDC550FB95X001	6.0

B-type and C-type driven plates can be used on the flywheel side of the clutch to provide increased hub to crank bolt clearance.

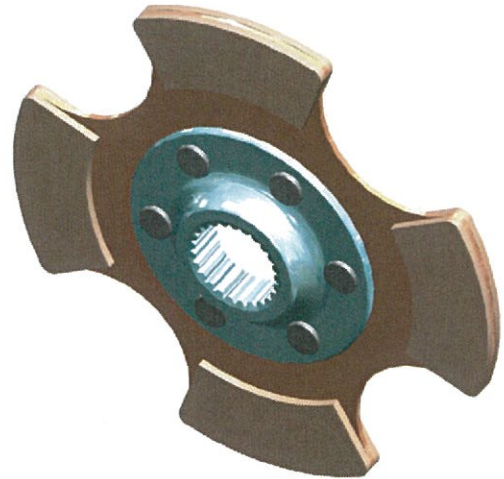

Applications

General Rally use.

Key features and benefits

- Optimised design.
- Optimised hub length for low inertia with minimum hub wear.
- Cerametallic friction material for high energy capacity and increased wear rate.
- Interchangeable with other manufacturers' product.
- Various hub configurations available to provide increased hub to crank bolt clearance.
- 6mm plate thickness.

Hub types

